

Cooper Lighting Solutions - ALL-PRO™

DESCRIPTION

The ALL-PRO™ LED Vapor tight Floodlight provides an indoor/outdoor solution in applications where lighting fixture protection is required. The fixture provides equivalent light output up to 100-watt incandescent and 23-watt CFL fixtures, with high-quality and long lasting illumination. The fixture is vapor tight to protect against dust and moisture. Ideal for patios, garages, storage, and industrial areas. This fixture's traditional look and warm color temperature gives consumers the comfort of lighting they are used to.

Catalog #		Type
Project		
Comments		Date
Prepared by		

SPECIFICATION FEATURES

Construction

- Durable die-cast aluminum housing and cage provides protection against vandalism
- Vapor tight IP65 rating protects against dust and moisture
- Versatile mounting options – Wall, Ceiling and Post
- Frosted glass lens
- (5) 1/2 NPT Conduit openings

Electrical


- Maintenance-free LEDs with L70 50,000 hours of life
- Universal 120-277V power supply
- Fixture operating temperature range from -20°C to 40°C
- cULus listed for wet locations

Optics

- 3500K color temperature
- Fixture produces up to 1450 Lumens

Warranty


- 5 year limited warranty




LED VAPOR TIGHT FLOODLIGHT

DIMENSIONS

Top View

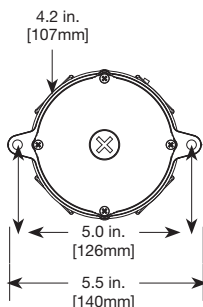

Side View

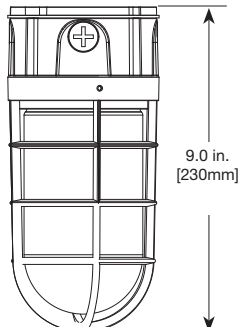

ORDERING INFORMATION

Sample Number: VT1730




Application

VT = Vapor Tight



Series

17 = 17Watts



Color Temperature

30 = 3500K


CERTIFICATION DATA

cULus Wet Location Listed
Lighting Facts® Approved

TECHNICAL DATA

-20°C to 40°C Temperature Rating
Wall, Ceiling, and Post Mount

PHOTOMETRICS

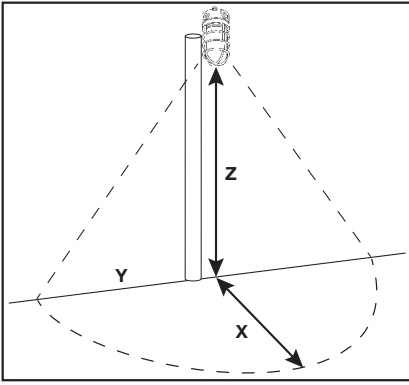

		.25 Fc Coverage Area					
		8'		10'		15'	
Model Number	Lumens	X	Y	X	Y	X	Y
VT1730	1496	15	34	15	36	14	37

Technical Information

Model Number	Description	Voltage (V)	Power (W)	Delivered Lumens	Efficacy (Lum/Watt)	LED Color Temperature (K)	CRI
VT1730	ALL-PRO LED Vapor Tight Floodlight	120-277V	17.7	1450	82	3500K	80